




Art of the Analog Console

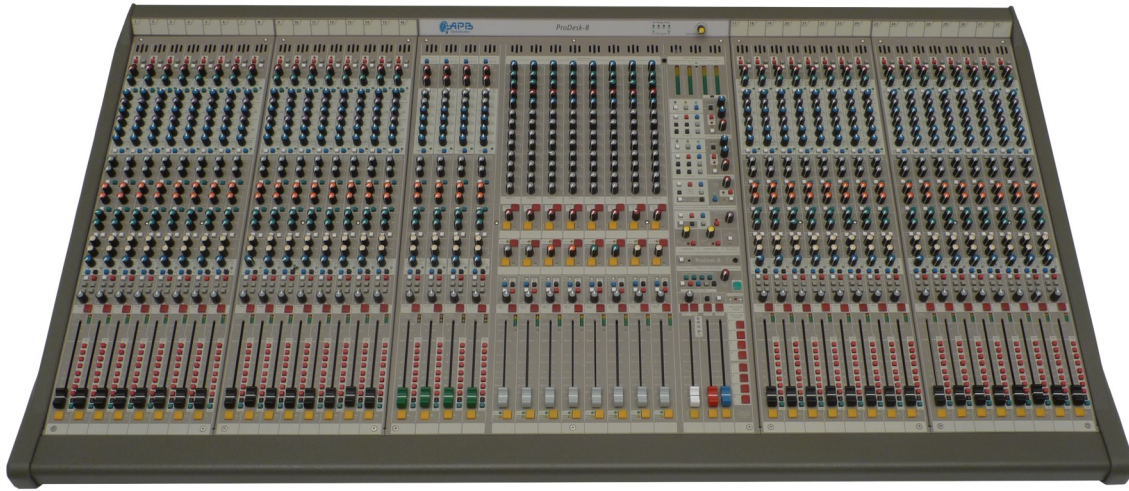






ProDesk-8tm

APB-DynaSonics' ProDesk-8 medium-format, front-of-house console incorporates a wealth of professional features derived directly from the larger format Spectra-C console. Intended for use in Production, AV and Contracting applications, ProDesk-8 offers simple operation while providing uncompromised audio quality and reliability in a compact and affordable package.

FEATURE OVERVIEW (See our website at APB-DynaSonics.com for more detailed information):

- Available in modular blocks of 24, 32, 40, and 48 Mic/Line Input Channels.
- All versions include 4 Stereo Line-input channels with Split-Track capabilities.
- Input channels include high quality 100mm Faders, Internally illuminated Mute and PFL switches, 6 segment channel metering, 48 Volt Phantom Power switch with LED, Mic/Line, Pad and Polarity-Reverse switches.
- 8 Auxiliary sends are switchable pre/post fader in pairs and pre/post EQ as a group and include 2 pairs of auxiliary sends that are switchable between mono and stereo operation. A 9th send is provided to a dedicated mono bus by way of fixed or variable level assign switches for use with Sub-Woofers or as an additional post-fader aux send.
- 4-band EQ with sweepable mid-frequencies with a 1 octave bandwidth and switchable 60/120Hz Low-Frequency and 8k/12kHz High-Frequency EQ. A channel EQ-On switch with LED is provided, Variable High-Pass filter with a 20Hz-400Hz range with On switch and LED.
- Outputs include 8 analog subgroups, 8 matrix outputs, Left/Right, Center, and Mono (subwoofer). All include XLR Balanced output connectors, TRS pre fader insert points, and TRS Balanced bus inputs. Stereo USB Digital output derived from L-R, Center, Mono, Aux 1-2 and Matrix 1-2.
- Digital USB Stereo Input and Record Output. Digital inputs assignable to all primary mix buses via Stereo D input or Stereo Program input.
- Remote muting of all primary outputs using a single Opto-Isolated Phoenix connector.
- Spectra-derived construction includes the use of mother / daughter board construction for easy service and uncompromised performance.
- Low phase-shift, direct-coupled circuitry and extended bandwidth design.
- Plug-in Power Supply (same as used in Spectra Consoles) for ultra reliability. An optional redundant power supply can be added to all sizes.
- Dimensions: Depth: 27.25" (692mm) Height: 8.9" (226mm) Width: 24 Mono input 44.5" (1130mm) , 32 Mono input 52.6" (1336mm), 40 Mono input 60.7" (1542mm), 48 Mono input 68.8" (1748mm)

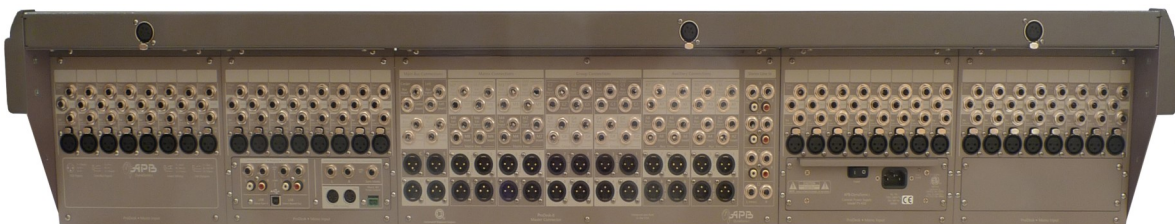

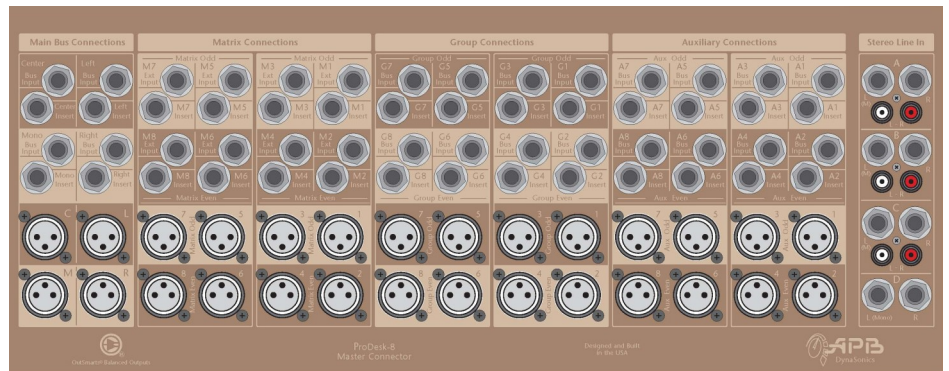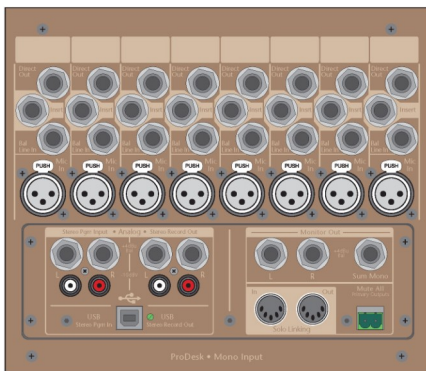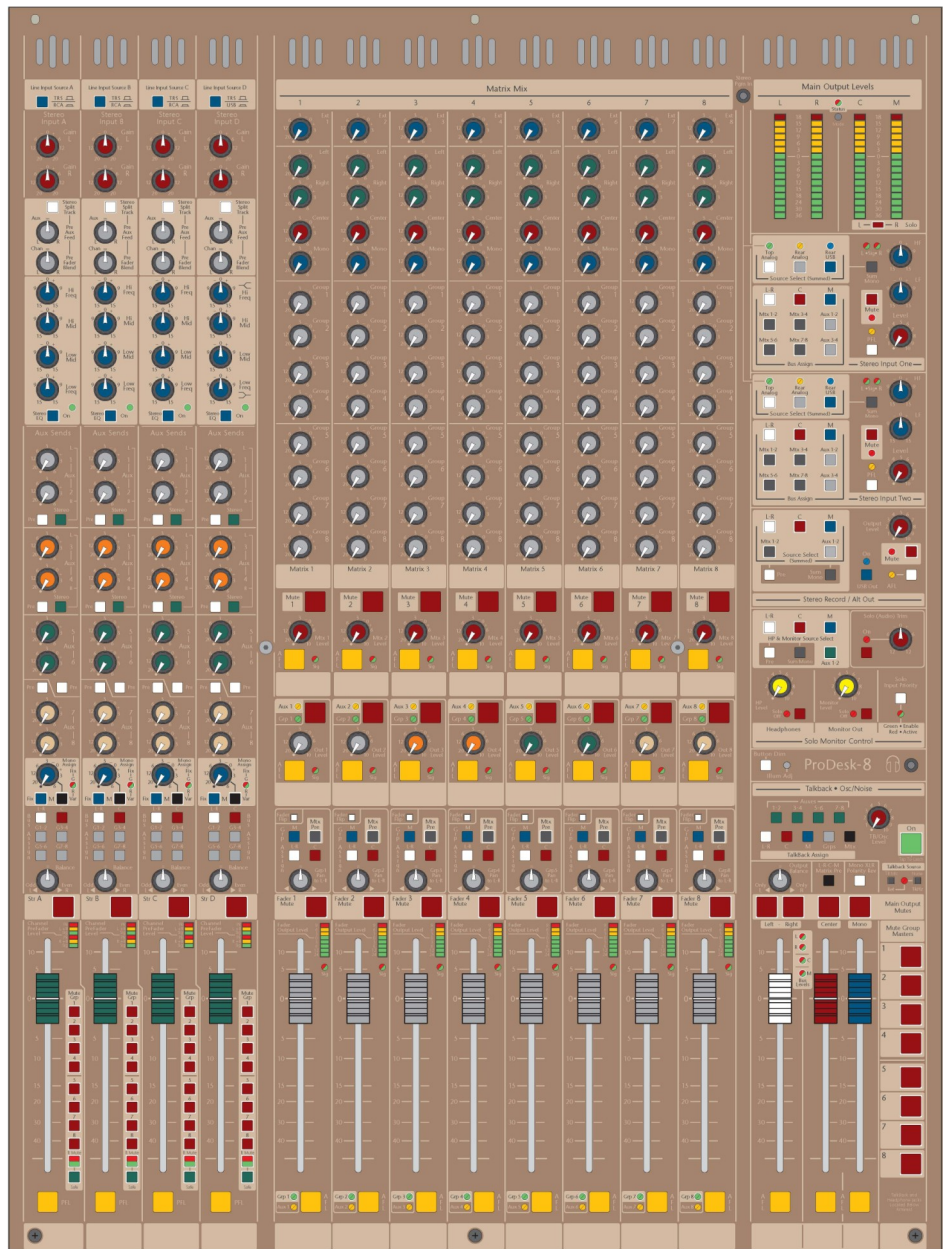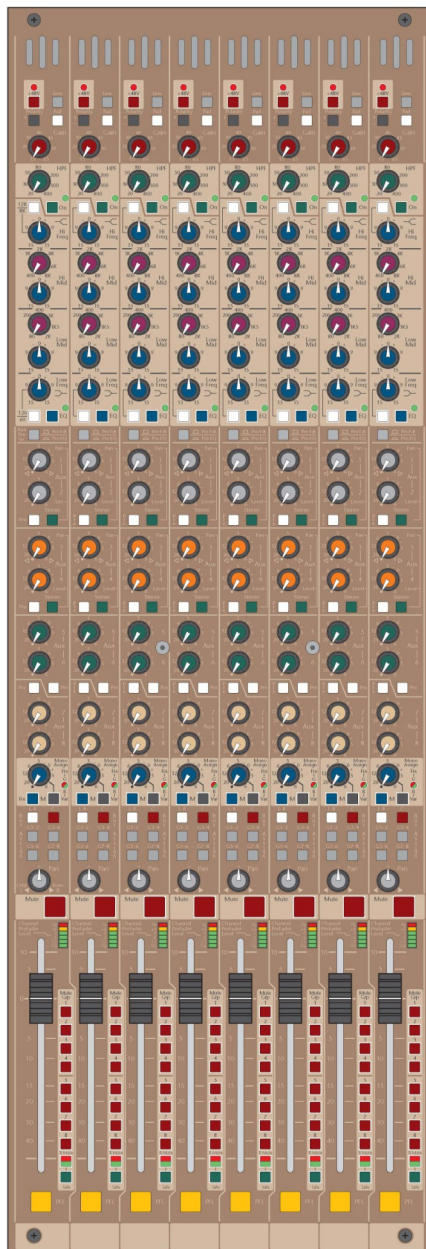

All ProDesk-8 Consoles are supplied with one modular Power Supply, with a second redundant power supply available as an option. All specifications and features are subject to change without notice. Please see our website at APB-DynaSonics.com for additional detailed information on ProDesk Consoles and the complete line of APB-DynaSonics mixing products.

